

Two-part H. Design square floor drain (250 x 250 mm) W250 / DN110 V2, H2

ATT stainless steel floor drain features:



Vertical outlet DN110



Horizontal outlet DN110

- the drain is manufactured according to EN 1253 and EHEDG guidelines
- square shape,
- upper part of the body 250 x 250 mm,
- hygienically deep-pressed body without sharp corners or elements,
- rounded body diameter: 157 mm,
- bottom body diameter: 193mm,
- height adjustable from 80 to 135mm, possibility of rotation 360° and tilting by 6°,
- no fluid backing up in the floor drain's body
- flow rate V2 - 3.0 l/s, H2 - 2.1 l/s,
- siphon with EPDM gasket,
- height of the water column is 50 mm according to EN 125,
- waste basket (capacity 1 l) with handle,
- top edge brushed,
- M10 adjustment screws,
- material EN 1.4301, AISI 304 or EN 1.4404, AISI 316L,
- sheet thickness: 1.5 mm and 1.2 mm.



Water trap



Waste basket




Sand basket

Grating of the floor drain

(250 x 250 mm) W250 / DN110 V2, H2

Mesh grating, with 25 x 25 mm mesh, with R13 anti-slip surface according to DIN 51130. Meets the requirements of load class L15 according to EN 1253.

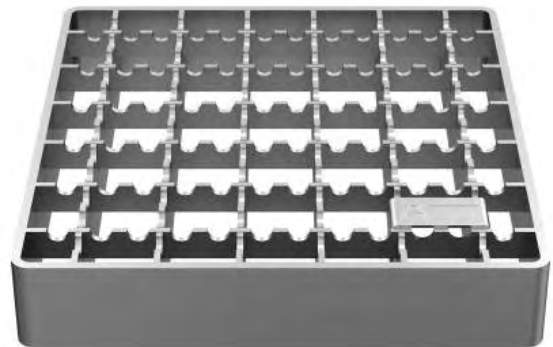

Slab grate with side gap, easy to remove. R10 anti-slip surface in accordance with DIN 51130. Meets the requirements of load class M125 in accordance with EN 1253.



Ladder grate with smooth, non-slip surface R9 in accordance with DIN 51130. Meets the requirements of load class M125 in accordance with EN 1253. Complete welding in accordance with EHEDG compliant.

